

CAMSO SKS 532



SKID STEER
LOADERS



BEST GENERAL DUTY SOLUTION

A next generation skid steer tire solution for tough, off-road applications. Delivers enhanced durability, traction and side impact resistance for excellent value, performance and low operating costs.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO SKS 532



EXTRA-DEEP TREAD DEPTH WITH CURVED TREAD LUGS

- Ensures great durability and extra traction

SELF-CLEANING STEPPED TREAD

- Maximizes cleanout for improved off-road traction



IMPACT GUARD SIDEWALL DESIGN


- Deflects debris to better protect sidewalls and reduce stress cracking

VOID GUARD TREAD IMPACT PROTECTION

- Protects from tread punctures to minimize flat tires

TIRE SIZE	PR	RIM SIZE	ACTUAL TIRE DIMENSIONS					INFLATION PRESSURE [bar]	MAXIMUM TIRE LOAD [kg]			
			O.D. [mm]	O.W. [mm]	O.T.D. [mm]	SLR [mm]	RC [mm]		Static	10 km/h	15 km/h	30 km/h
5.70 - 12 NHS	4	5JAx12; 4.50-I-70; 4.50-I-90	567	156	13	268	1710	4,1	1045	660	520	450
23 X 8.50 - 12	6	7JAx12; 7.00-I-70; 7.00-I-90	575	218	13	266	1734	3,4	1295	820	650	560
26 X 12.00 - 12	10	10.5x12; 10.50-I-70; 10.50-I-90; 8.50-I-70; 8.50-I-90; 8 1/2JA	648	306	20	297	1954	4,5	2530	1600	1265	1090
27 X 8.50 - 15 NHS	8	7JAx15	678	220	14	316	2045	4,1	2185	1305	1090	925
31 X 15.50 - 15 NHS	8	13LBx15	788	395	23	366	2377	3,1	3315	1975	1650	1400
10-16.5 NHS	10	8.25	30.2	10.9	23	14.0	91.2	75	7440	4710	3720	3205
12-16.5 NHS	12	9.75	32.7	13.0	24	15.1	98.9	80	9985	6320	4995	4300
14-17.5 NHS	14	10.50	36.4	13.8	30	16.7	109.8	80	13495	8540	6745	5805

PERFORMANCE COMPARISON

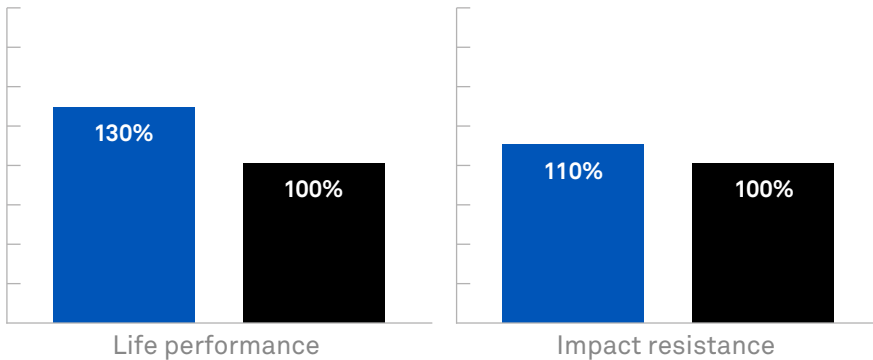

CAMSO SKS 532

XTRA WALL

With a new premium compound and deeper tread depth increase, Camso SKS 532 shows 30% better life performance compared to Xtra Wall in controlled conditions.

With high lug to void ratio and the added protection of the new Void Guard feature, SKS 532 demonstrated 10% better tread impact protection.

AUTHORIZED DISTRIBUTOR:

camso.co

