# **CAMSO SKS 753**





## MOST VERSATILE ALL-SEASON TIRE FOR MIXED SURFACE APPLICATIONS

A next generation tire solution for soft and mixed surface operations. With enhanced tread life, excellent traction and puncture resistance, it's the perfect choice for a wide variety of heavy-duty applications.

camso.co

### **PERFORMANCE**


TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



## **CAMSO SKS 753**



## INNOVATIVE NON-DIRECTIONAL TREAD PATTERN

 Provides greater durability and versatility for mixed surface applications

#### OPTIMZED LUG-TO-VOID RATIO TREAD DESIGN

Provides excellent versatility and durability

## IMPACT GUARD WITH ENHANCED RIM PROTECTION

 Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires


#### **OPEN, STEPPED SHOULDER LUGS**

 Enhances cleanout and traction on softer surfaces

									TA.						
TIRE SIZE	PR	RECOMMENDED RIM SIZE (PERMITTED)	ACTUAL TIRE DIMENSIONS					MAXIMUM INFLATION	MAXIMUM TIRE LOAD [kg] [lb]						
			0.D. [mm] [in]	0.W. [mm] <i>[in]</i>	0.T.D. [mm] [32 <sup>nd</sup> in]	S.L.R. [mm] [in]	R.C. [mm] [in]	PRESSURE [bar] [PSI]	Static	10 km/h 5 mph	15 km/h 10 mph	20 km/h 12.5 mph	30 km/h 20 mph	40 km/h 25 mph	50 km/h 30 mph
<b>27x8.50-15 NHS</b> (210/70-15; 215/70-15)	8	7JA	679	224	19	321	2048	4.15	2185	1305	1090	1040	925	875	825
			26.7	8.8	24	12.6	80.6	60	4825	2875	2400	2295	2040	1930	1820
<b>10-16.5 NHS</b> (260/70-16.5)	10	8.25	791	268	29	367	2386	5.20	3375	2135	1685	1625	1450	1410	1345
			31.1	10.6	37	14.4	93.9	75	7440	4710	3720	3580	3205	3110	2965
<b>12-16.5 NHS</b> (300/70-16.5)	12	9.75	837	326	29	388	2496	5.50	4525	2865	2265	2175	1950	1890	1805
			33.0	12.8	37	15.3	98.3	80	9985	6320	4995	4805	4300	4170	3980
<b>14-17.5 NHS</b> (360/70-17.5)	14	10.50	950	357	40	436	2861	5.50	6125	3875	3060	2945	2635	2560	2440
			37.4	14.1	50	17.2	112.6	80	13495	8540	6745	6490	5805	5635	5380

All tires listed are tubeless.

#### PERFORMANCE COMPARISON

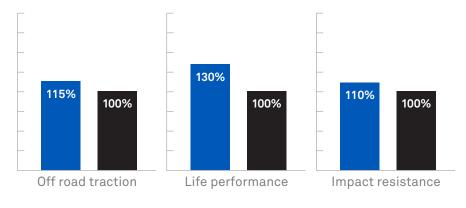

CAMSO SKS 753

Hauler SKZ

Camso SKS 753 has stepped shoulder lugs for better versatility in off road conditions and 30% better life performance compared to Hauler SKZ in controlled conditions. With high lug-to-void ratio, SKS 753 demonstrated minimum 10% better impact resistance compared to the legacy tire.

AUTHORIZED DISTRIBUTOR:

camso.co



1902\_CO\_Tire\_ProductSheet\_SKS 753\_A4\_Mixed\_EN\_V4